Style Guide

Maintaining the Brand





Importance of Maintaining a Consistent Corporate Brand & Image

Your corporate identity should be considered one of your company's most precious assets. It should be guarded and protected as such. The cost of not doing so is confusion, loss of time and money, frustration and the potential loss of brand equity.

This usage guide ensures the protection of your corporate identity; documents the precise rules of usage that, if applied consistently, will protect your brand and the investment made in it. Strict adherence to these rules that govern corporate branding will establish brand equity—and permit all communications produced to take on a unified look and feel.



TESTED. TRUSTED. ENGINEERED.

Table of Contents

About S-5! Approved Company Descriptions	5
Logo Usage • The Right Way • Logo Dimensions • Full Color and Black and White Usage of Logo	7
Color Scheme Two-Color Usage General Color Palette	∋ I O
Use of Product Names	11
 Trademark and Registered Symbols Products Listed By Solution Descriptors Upon First Reference 	12 15

Approved Company Descriptions

About S-5! (Long version) (116 WORDS)

Founded by a veteran metal roof expert, S-5! has been the leading authority on metal roof attachment solutions since 1992. S-5!'s zero-penetration clamps and lifetime brackets attach ancillary items to standing seam and exposed-fastened metal roofs respectively, while maintaining roof integrity and warranties. S-5! solutions are engineered for a variety of applications: snow retention, fall protection and wind performance systems, satellite dishes, solar arrays, signs/banners, light fixtures, stack/flue bracing, walkways, HVAC, lightning protection, equipment screens, conduit, condensate lines and more.

Made in the U.S.A., S-5!'s solutions have revolutionized the metal roofing industry and are now installed on more than 2 million metal roofs worldwide, providing strength and longevity never before seen. For more information, visit www.S-5.com.

About S-5! (Short version) (81 WORDS)

Founded by a veteran metal roof expert, S-5! has been the leading authority on metal roof attachment solutions since 1992. S-5!'s zero-penetration clamps and lifetime brackets attach ancillary items to standing seam and exposed-fastened metal roofs respectively, while maintaining roof integrity and warranties. Made in the U.S.A., S-5! solutions are engineered for a variety of roof-mounted applications and are now installed on more than 2 million metal roofs worldwide, providing strength and longevity never before seen. For more information, visit www.S-5.com.

About S-5! (Shortest version) (48 WORDS)

Founded by a veteran metal roof expert, S-5! has been the leading authority on metal roof attachment solutions since 1992. S-5!'s zero-penetration clamps and lifetime brackets attach ancillary items to standing seam and exposed-fastened metal roofs respectively, while maintaining roof integrity and warranties. For more information, visit www.S-5.com.

The Right Way™

In all instances, the *The Right Way* must be used:

- with the first letter of each word capitalized; <u>The Right Way</u>
- in its designated font, Arial and in italics.

The first and most prominent use of the mark *The Right Way*TM alone in a single document/website page must also be marked with the trademark symbol (TM).

Subsequent uses of *The Right Way* in paragraph copy do not need to include the trademark symbol (TM).

When *The Right Way* is used alone (not combined with the S-5! mark), boldface is optional but preferred.

When appearing as part of the S-5! logo, such as shown below, *The Right Way* must also be used:

- · in boldface
- but without the trademark symbol (™).



An exclamation point may only be added after *The Right Way*, when it falls at the end of sentence and only within context of paragraph copy and not as a general practice.

Example: Stop doing it the wrong way, when with **S-5!**, you can do it *The Right Way!*

Logo Usage

Logo Dimensions

When using the S-5! logo, please pay close attention to the specific dimensions for the placement of the text, punctuation marks, and registered trademark symbol. You can find the official logo file in the Drive at (need link).

Ensure that "The Right Way" remains consistently centered beneath the S-5! logo, and do not scale it separately from the S-5! portion. Always use "The Right Way" exactly as shown here.



Full Color and Black and White Usage of Logo

Whenever possible, the S-5! logo should appear in two colors on black. When necessary, the black or white versions may be used. A reversed treatment must be used whenever the white version of the logo is used (i.e. dark/black background).







Full Color Usage of Logo

The full color treatment of the logo may not work when interacting with certain backgrounds and textures. When not practical, or when the colors will detract from the effectiveness of the brand, place the logo on a black rectangle.

Other options and treatments must be approved prior to use.

Logo Margin and Background Limitations

Clear areas or control margins have been established for the S-5! logo. The clear area around the logotype should be at least 50% of the height of the mark.

The S-5! logo should not be enclosed within a graphic shape or border for the purpose of enclosure, as this would be mistaken as part of the identity.





Centering the Logo

Color Scheme

Two-Color Usage

When four-color printing is not possible, use of a two-color design is acceptable. Use the S-5! Gold Spot Color PMS 123 C and black for the two colors. Pantone inks will print a consistent color whereas CMYK may print differently on different print runs. See the next page for CMYK and RGB equivalents.

PANTONE


123C


Spot

Black

Color Scheme

General Color Palette





Black

Spot PANTONE 1230

CMYK 0 19 89 0

RGB 255 206 5

Hexadecimal #FDC82F

#FFCE34 (PRINT) Spot Black

CMYK 0 0 0 100

RGB 000

Hexadecimal #000000

Rich Black to be used in printing when plain black gives insufficient coverage.

CMYK 40 60 0 100

Use of Product Names

When referring to S-5! products in written materials or online, always use the appropriate trademark symbols and registered symbols (as provided on pages **12-14**) with the product name upon first reference per published page/per website page. For the purposes of this style guide, S-5! defines first reference as the most obvious or prominent place on the page (where the eye is drawn to).

Additionally, always use descriptors with product names upon first reference, i.e., PVKIT[®] solar solution, ColorGard[®] snow guard system, S-5-S[™] clamp, Protea[™] Bracket attachment. The only exception is use of the company name S-5![®] (no descriptor required). However, do not use S-5! as a possessive noun, i.e., S-5!'s PVKIT.

Upon second and further references in written materials or online, you may use the product name without the trademark/registered mark symbols and without the descriptor, but you must distinguish the mark from surrounding text as noted below, i.e., PVKIT, ColorGard and Protea Bracket. For a complete list of appropriate descriptors with associated products, see pages **15-18**.

Do not use product names in plural form, i.e., SnoRails, SnoFences, SnowFeet

Distinguishing Marks from Surrounding Text

Upon second and further references, per published page, always display marks in a distinctive manner by setting them apart from surrounding text such as using capital letters, italics, bold, color or quotation marks, i.e., ColorGard, Protea Bracket. Some S-5! products are in all caps so that addresses this concern for those products, i.e., PVKIT, PVKONCEAL. See page **12-14** for appropriate capitalization of product names.

Consistently Use Same Form of the Mark

Ensure use of the mark is consistent. The mark must be used in the form it was filed/registered and should be used in the same way every time. For example, the marks "PVKIT" and "PVKONCEAL" should always be uses as one word and capitalized, not partly capitalize, not two words and not with hyphens.

Again, see page 15-18 for appropriate descriptors with associated product names.

Trademark and Registered Symbols

Here are the correct Registered (®) and Trademark (™) symbols that correspond with each S-5! product. All products are listed by solution.

Snow Retention	Solar	Utility	Brackets
ColorGard®	CanDuit™	GRIPPERFIX [®]	CorruBracket™
ColorGard® Punched			CorruBracket™ 100T
ColorGard® UnPunched	DirectAttach™	GRIPPERFIX [®] Leveler	
ColorGard® Splice		 GRIPPERFIX® Strut	CorruBracket™ 500T
ColorGard® 2.0	MLPE Mount™	Oran Ena De Guat	CorruBracket™ 100T PV
DualClip™ II	 PVKIT®		CorruBracket™ 500T PV
DualClip™ III	FVKII		Protea™ Bracket
DualGard™	PVKIT® EdgeGrab		
DualPipe™	L viai Lagooias		RibBracket™ I-V
DualPipe™ End Cap & Collar	PVKIT® MidGrab		RibBracket™
NEX® pipe			RibBracket™ I
S-5-ASF TM	PVKONCEAL™		RibBracket™ II
S-5-AE™ S-5-BSF™			RibBracket™ III
S-5-BE™	S-5-PVKIT® HUR 2.0		
SnapClip™ II	 SolarFoot™		RibBracket™ IV
SnapClip™ III			RibBracket™ V
SnoClip™ II	S-Timator™		SnoBracket™
SnoClip™ III			SnoBracket™ RB
SnoFence™			SnoBraket™ TB
SnoPost™			
SnoPost™ B			SolarFoot™
SnoPost™ BE			TrapBracket™
SnoPost™ E			TrapBracket™ 2.0
SnoRail™			VersaBracket™
VersaClip™			VersaBracket™ 47
VersaClip™ Long			
X-Clip™ II			VersaBracket™ 67
X-Clip™ III			
X-Gard™ 1.0 X-Gard™ 2.0			
X-Gard™ End Cap			
VersaGard™			
VersaGard™ V			12
10.000010	l		12


Trademark and Registered Symbols (Continued...)

Here are the correct Registered (®) and Trademark (™) symbols that correspond with each S-5! product. All products are listed by solution.

Clamps	Wind	Inserts
S-5-B™	WindClamp™	S-5-GX™ 10
S-5-B™ Mini	 WindClamp™ DL	S-5-GX™ 50
S-5-E™	Wind Claimp BE	
S-5-E™ Mini	WindClamp™ UD	S-5-GXM™ 10
S-5-EF™	 WindClamp™ 2X	S-5-GXM™ 50
S-5-FA™		
S-5-H™		S-5-KHD™ 3"
S-5-H™ Mini		S-5-KHD™ 6"
S-5-H90™		
S-5-K Grip™		
S-5-K Grip™ Mini		
S-5-K Grip™ Snow		
S-5-KHD™		
S-5-KL7™		
S-5-MX™ Mini		
S-5-N™		
S-5-N™ Mini		
S-5-N™ 1.5		
S-5-N™ 1.5 Mini		
S-5-NH™ 1.5		
S-5-NH™ 1.5 Mini		
S-5-Q™		
S-5-Q™ Mini		
S-5-R465™		
S-5-R465™ Mini		13

Trademark and Registered Symbols (Continued...)

Here are the correct Registered (®) and Trademark (™) symbols that correspond with each S-5! product. All products are listed by solution.

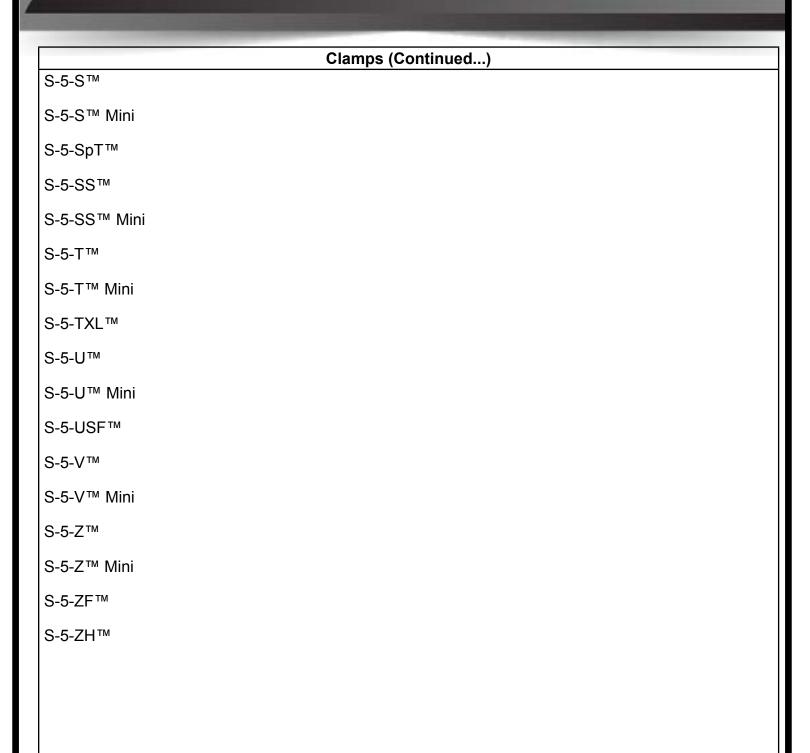

Descriptors Upon First Reference

Always use descriptors with product names upon first reference per published page/per website page. S-5! defines first reference as the most obvious or prominent place on the page (where the eye is drawn to). Upon second and further reference, drop descriptors, trademarks and registered marks.

Snow Retention	Solar	Brackets
ColorGard® snow guard system	CanDuit™ clamp	CorruBracket™
ColorGard® Punched crossmember	DirectAttach™ solar mount	attachment
ColorGard Function crossmerriber	DirectAttacii Solai Illoulit	CorruBracket™ 100T
ColorGard® UnPunched crossmember		attachment
CalarCand® Calina	solar solution	CorruBracket™ 500T
ColorGard® Splice	 PVKIT® EdgeGrab	attachment
ColorGard® 2.0 snow guard system		Corruption 100T DV
Dual Clip TM II accessor	PVKIT® MidGrab	CorruBracket™ 100T PV attachment
DualClip™ II accessory	 PVKONCEAL™	
DualClip™ III accessory	module skirt	CorruBracket™ 500T PV attachment
Duel Cond TM are on a superior	S-5-PVKIT® HUR 2.0	allaciineni
DualGard™ snow guard system	solar solution	Protea™ Bracket attachment
DualPipe™ crossmember		Protea™ II attachment
DualDia a IM Ford Con 9 College	SolarFoot™ attachment	
DualPipe™ End Cap & Collar	S-Timator™ solar	RibBracket™ I-V attachment
NEX® pipe crossmember	calculator	RibBracket™ attachment
S-5-BSF™ clamp		Dib Drack at TM Lattach mant
3-3-B3F ···· Clamp		RibBracket™ I attachment
S-5-BE™ clamp		RibBracket™ II attachment
SnoClip™ 2.0 II accessory		RibBracket™ III attachment
2.0 ii decessory		
SnoClip™ 2.0 III accessory		RibBracket™ IV attachment
		RibBracket™ V attachment
		15

Descriptors Upon First Reference (Continued...)

Always use descriptors with product names upon first reference per published page/per website page. S-5! defines first reference as the most obvious or prominent place on the page (where the eye is drawn to). Upon second and further reference, drop descriptors, trademarks and registered marks.

Cross Deterribes (Open)	114334.	Dunglista (Ocata
Snow Retention (Cont)	Utility	Brackets (Cont)
SnoFence™ snow guard system	GRIPPERFIX® utility mounting system	SnoBracket™ attachment
SnoPost™ attachment	 GRIPPERFIX® Leveler	SnoBracket™ RB attachment
SnoPost™ B attachment	 GRIPPERFIX® Strut	SnoBracket™ TB attachment
SnoPost™ BE attachment		SolarFoot™ attachment
SnoPost™ E attachment		TrapBracket™ attachment
SnoRail™ snow guard system		TrapBracket™ 2.0 attachment
VersaClip™ 2.0 accessory		VersaBracket™ attachment
		VersaBracket™ 47 attachment
VersaClip™ 2.0 Long accessory		VersaBracket™ 67 attachment
X-Clip™ II accessory		
X-Clip™ III accessory		
X-Gard™ 1.0 clamp		
X-Gard™ 2.0 clamp		
X-Gard™ End Cap attachment		
VersaGard™ bracket		
VersaGard™ V bracket		
		16

Descriptors Upon First Reference (Continued...)

Grouped by Solution

Clamps	Wind
S-5-B™ clamp	WindClamp™ external seam clamp
S-5-B™ Mini clamp	WindClamp™ DL external seam clamp
S-5-E™ clamp	WindClamp™ UD external seam clamp
S-5-E™ Mini clamp	WindClamp™ 2X external seam clamp
S-5-EF™ clamp	
S-5-FA™ clamp	
S-5-H™ clamp	
S-5-H™ Mini clamp	
S-5-H90™ clamp	
S-5-K Grip™ clamp	
S-5-K Grip™ Mini clamp	
S-5-K Grip Snow™ clamp	
S-5-KHD™ clamp	
S-5-KL7™ clamp	
S-5-MX™ Mini clamp	
S-5-N™ clamp	
S-5-N 1.5™ clamp	
S-5-NH 1.5™ clamp	
S-5-NH 1.5™ Mini clamp	
S-5-Q™ clamp	
S-5-Q™ Mini clamp	
	47
	17

Descriptors Upon First Reference (Continued...)

Grouped by Solution

Clamps	Inserts
S-5-R465™ clamp	S-5-GX™ 10 insert
S-5-R465™ Mini clamp	S-5-GX™ 50 insert
S-5-S™ clamp	S-5-GXM™ 10 insert
S-5-S™ Mini clamp	S-5-GXM™ 50 insert
S-5-SpT™	S-5-KHD™ 3" insert
S-5-SS™ clamp	S-5-KHD™ 6" insert
S-5-SS™ Mini clamp	S-5-KHD ···· 0 IIISeII
S-5-T™ clamp	
S-5-T™ Mini clamp	
S-5-TXL™	
S-5-U™ clamp	
S-5-U™ Mini clamp	
S-5-USF™ clamp	
S-5-V™ clamp	
S-5-V™ Mini clamp	
S-5-Z™ clamp	
S-5-Z™ Mini clamp	
S-5-ZF™ clamp	
S-5-ZH™ clamp	
	18

