

S-5!®

The Right Way

Protea™ II




Shown with PVKIT®

Universal bracket compatible with roofs in Spain and Latin America

A versatile bracket for mounting solar PV to trapezoidal-rib metal roof profiles.

Protea™ II features an adjustable attachment base and module attachment options to accommodate different metal roof profile dimensions. The bracket is designed to fit on common exposed-fastened, trapezoidal-rib roof profiles in the Spanish and Latin American regions.

The adjustability of Protea II allows it to be used on trapezoidal-rib roofs with a top length up to 90 mm.

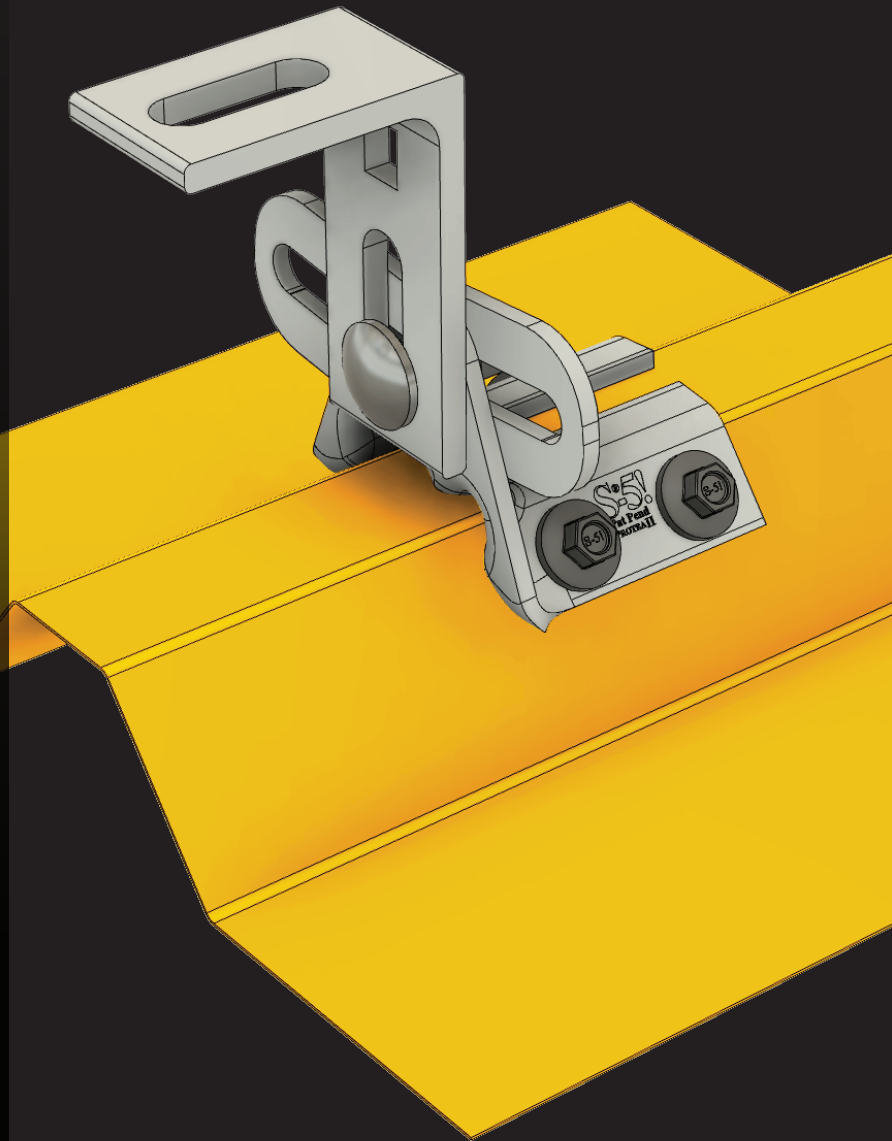

Features and Benefits



**Designed to fit
trapezoidal-rib roofs
with top length up to
90 mm**

**Compatible
with PVKIT**

**Universal bracket
compatible with most
IMP roofs in Spain and
Latin America**

**4 self-piercing
screws provided**

Protea™ II

The Right Way to attach solar PV to trapezoidal roof profiles!

Our pre-applied EPDM gasket with peel-and-stick adhesive simplifies installation, ensuring accurate and secure placement.

With no messy sealants, faster installation and a weatherproof fit, Protea II offers you the most versatile solar attachment solution available.

No extra L-Foot required: The integrated L-Foot is adjustable, allowing rail or rail-less solar mounting.

Ideal for rail-based solar PV installations, Protea II is designed to be paired with the S-5! PVKIT® for rail-less mounting. Bracket comes with an additional M8 nut to be used in this application.

Protea II is the perfect solar attachment solution for most trapezoidal and IMP, exposed-fastened metal roof profiles!

Protea II is compatible with common metal roofing materials and comes with a pre-applied EPDM gasket on the base.



For design assistance, ask your distributor, or visit www.S-5.com for the independent lab test data that can be used for load-critical designs and applications. Also, please visit our website for more information including metallurgical compatibilities and specifications.

Note: All four holes must be used to achieve tested strength. Fasteners are provided.


S-5! holding strength is unmatched in the industry.

S-5! stands as the preferred choice for superior quality and effortless installation, earning endorsements from every major roof manufacturer.

Maximum and Minimum Width Adjustment

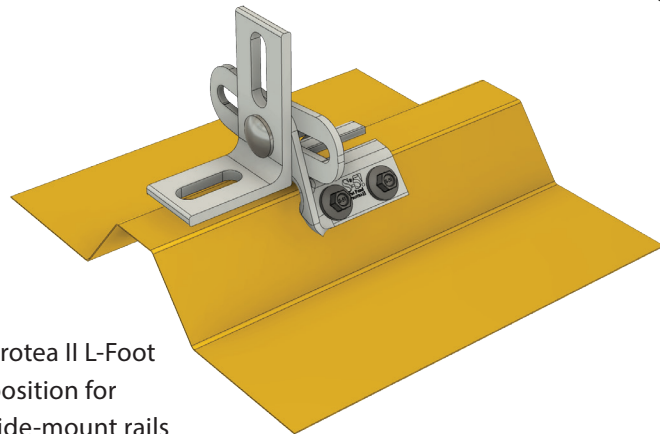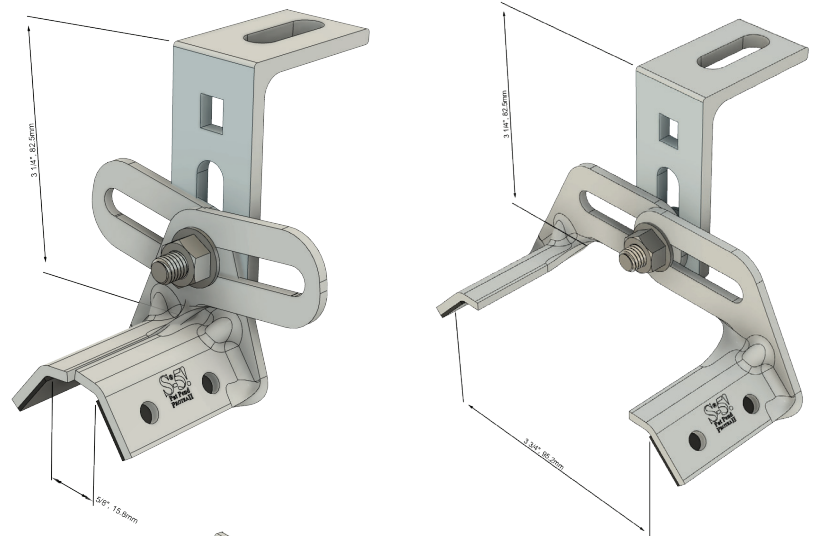

Protea II L-Foot position for side-mount rails

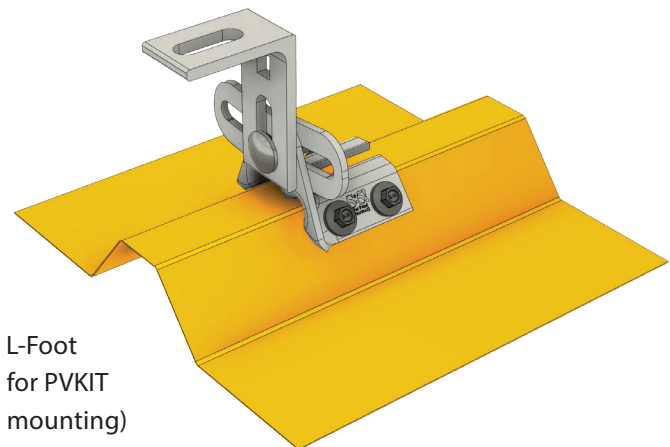

Protea II L-Foot position for PVKIT (rail-less mounting)

S-5!® Warning! Please use this product responsibly!

For published data regarding holding strength, bolt torque, patents and trademarks, visit the S-5! website at www.S-5.com.

Copyright 2024, Metal Roof Innovations, Ltd. S-5! aggressively protects its products, patents, trademarks, and copyrights. v070224

Distributed by